This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

(11) International Publication Number:

WO 98/53428

G06T 17/40, G06F 3/033

A1 (43) International Publication Date:

26 November 1998 (26.11.98)

(21) International Application Number:

PCT/IL98/00222

(22) International Filing Date:

19 May 1998 (19.05.98)

(30) Priority Data:

120867

20 May 1997 (20.05.97)

π.

(71) Applicant (for all designated States except US): CADENT LTD. [IL/IL]; Hamelacha Street 14, 60372 Or Yehuda (IL).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): KOPELMAN, Avi [IL/IL]; Ido Street 8, 52233 Ramat-Chen (IL). NIS-SENBAUM, Baruch [IL/IL]; Sara Haronson Street 23, 52293 Ramat Gan (IL).
- (74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: COMPUTER USER INTERFACE FOR ORTHODONTIC USE

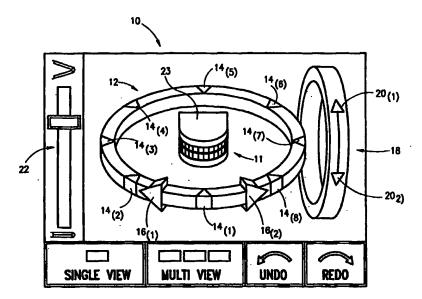

(57) Abstract

In a computer system that includes a Central Processing Unit and an associated input device, storage device and display device, a method for displaying on the display device a virtual three-dimensional (3D) dental model at desired preset views, for orthodontic use. The virtual 3D dental model is stored on the storage device and is indicative of a 3D structure of an individual's dental arches. The method includes the steps of providing a graphic user interface (GUI) that includes a graphic representation of the dental model and a plurality of graphic symbols each representative of a desired pre-set view of the dental model from a desired direction. Selecting through the input device a graphic symbol from among the plurality of graphic symbols. Moving the dental model to a pre-set view which corresponds to the graphic symbol, whilst retaining the model in zoom.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	Prance	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco ·	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
ВJ	Benin	IR	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Кепуа	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KР	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal .		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
RR	Estonia	LR	Liberia	SG	Singapore		

COMPUTER USER INTERFACE FOR ORTHODONTIC USE

FIELD OF THE INVENTION

The present invention concerns viewing a three-dimensional (3D) object or portion thereof from a desired direction.

5 BACKGROUND OF THE INVENTION

10

15

20

25

Generally speaking, the manipulating of a computerized 3D image of a real-world object, is a very complicated task. The ever increasing need for such 3D manipulations, in various scientific and entertainment oriented applications, has encouraged the development of appropriate tools, and indeed many software tools, adapted for 3D manipulation, can be found in the marketplace, such as Auto-CAD, ver 13.0, commercially available from Autodesk. Inc.

Whilst Auto-CAD, (or similar tools), indeed provides a wide-range of manipulating features, it normally necessitates a long-term training period before it can be used effectively.

For appropriate Orthodontic diagnostics, the orthodontist is required to analyze a three dimensional structure of the individual dental arches (including the individual teeth) *inter alia* by observing the specified 3D structure from various preset views, e.g. from various directions around he virtual model, tilting the 3D structure, opening and closing the dental arches, and others.

A plaster model representative of the individual's 3D morphology of his/her dental arches is a common tool that is utilized to this end. The plaster model has, however, some drawbacks such as it being fragile i.e. it may be damaged due to inadvertent faulty care. Moreover, in order to evaluate the progress of orthodontic treatment of an individual, it is desired to compare and derive the discrepancies between two consecutive plaster models of the 3D morphology of the individuals dental arches. This task is very difficult when evaluating in a traditional manner the so obtained consecutive plaster models.

The latter drawbacks and others have encouraged the development of technology which provides for a virtual 3D model of the individual dental arch morphology (hereinafter virtual 3D dental model) that is represented in the computer and does not suffer from the limitation of a tangible physical model. The virtual dental model, as being a digital entity, can be stored on a storage medium, retrieved whenever required, duplicated and transmitted to a different remote site.

A technique for generating and storing a virtual 3D dental model in the computer is described, e.g. in WO 97/03622 published on February 6, 1997.

Viewing the virtual 3D dental model from desired directions and applying other manipulation to said image are possible, by utilizing traditional image manipulation tools, such as the specified AutoCAD. The latter, however, are effectively impractical for use by average orthodonts and other lab personal, who normally lack the adequate computer oriented background required to activate the complicated sequence of operations, in the specified software tool, which will eventually result in bringing the virtual image to the desired orientation.

For a better understanding of the foregoing, attention is now directed to Figs. 1A and 1B illustrating two subsequent rotation of a virtual 3D dental image with a 45 degree shift one with respect to the other.

In order to accomplish the movement of the virtual 3D dental model from the view of Fig. 1A to the view of Fig. 1B, whilst maintaining the respective images in optimized zoom and elevation, a specific set of instructions, should be invoked. There follows a brief description of the relevant commands which will serve, *inter alia* for accomplishing the specified model manipulation.

Thus, in order to obtain a view of the model from a desired view point one should specify the desired view point in terms of two angles, one with respect to the X axis (in the XY plane), and the "elevation from the XY plane.

Next, one should "zoom" the view to the extent of the display.

Of course a pre-calculation of the desired angle should be performed manually.

Thus, the relevant commands are:

VPOINT > CR

5

10

15

20

25

30

ROTATE > CR

ANGLE IN XY PLANE > 45 CR (where 45 stands for the desired angle)

ANGLE FROM XY PLANE > 30 CR (where 30 stands for the desired angle)

ZOOM > CR

5

10

15

20

25

30

EXTENDS > EXTENDS CR

It is accordingly understood that realizing e.g. a continuous motion around the model e.g. from the view of Fig. 1A to the view of Fig. 1B, is a very complicated procedure in accordance with the specified AutoCAD tool.

Those versed in the art will readily appreciate that an average orthodont who is not a skilled operator of the AutoCAD software tool (or any other sophisticated 3D manipulation utility), will not be able to utilize such a complicated tool.

In the context of the invention, optimal zoom is defined as essentially maintaining the entire model view on the screen and preferably also depicting the model at essentially the same location on the screen, after the model has been subject to manipulation.

It is accordingly the object of the present invention to provide a user friendly Graphical User Interface (GUI), which will enable even the most inproficient user to readily be able to manipulate a virtual 3D dental model between preset views that are commonly required for orthodontic treatment.

SUMMARY OF THE INVENTION

It is an important finding of the invention that the orthodont, during normal and daily use, is interested in well defined pre-set views of a virtual 3D dental model for accomplishing orthodontic treatment and accordingly a very simple and intuitive graphic user interface (GUI), is introduced in order to enable even the most in-proficient user to easily manipulate the virtual 3D dental model, and in this manner to achieve two fold advantage. On the one hand, benefiting from the advantages of manipulating virtual dental image as compared to tangible fragile model, and on the other hand, benefiting from easy and straight forward manipulation procedures essentially as if the virtual model were a physical model.

Accordingly, the present invention provides for:

in a computer system comprising a Central Processing Unit and an associated input device, storage means and display device, a method for displaying on said display device a virtual three dimensional (3D) dental model at desired pre-set views, for orthodontic use; the virtual 3D dental model is stored on said storage means and is indicative of at least a 3D structure of an individual's dental arches; the method comprising the steps of:

5

10

15

20

25

30

- (a) providing a graphic user interface (GUI) that includes a graphic representation of the dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;
- (b) selecting by means of said input device a graphic symbol from among said plurality of graphic symbols;
- (c) responsive to the selection of said graphic symbol, moving the dental model or portion thereof to at least one pre-set view which corresponds to said graphic symbol, whilst retaining the model essentially in zoom.

The present invention further provides for a computer system comprising a Central Processing Unit and an associated input device, storage means and display device, the computer system is adapted to display on said display device a virtual three dimensional (3D) dental model at desired pre-set views, for orthodontic use; the virtual 3D dental model is stored on said storage means and is indicative of at least a 3D structure of an individual's dental arches; the computer system comprising:

- (a) a graphic user interface (GUI) that includes a graphic representation of the dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;
- (b) means responsive to activation of said input device for selecting a graphic symbol from among said plurality of graphic symbols;
- (c) means responsive to the selection of said graphic symbol, for moving the dental model or portion thereof to at least one pre-set view which corresponds to said graphic symbol, whilst retaining the model essentially in zoom.

Still further the invention provides for a memory for storing data indicative of a graphic user interface (GUI), for access by a user in order to activate application program for orthodontic use;

said GUI includes a graphic representation of a dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;

said dental model is indicative of at least a 3D structure of an individual's dental arches.

BRIEF DESCRIPTION OF THE DRAWINGS 10

5

15

20

25

For a better understanding, the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figs. 1A-B are two schematic illustrations of respective views of a virtual 3D dental model;

Fig. 2 is a schematic illustration of a GUI, according to one embodiment of the invention:

Fig. 3 is a schematic illustration of a model in an XYZ coordinate system;

Fig. 4 is an illustrative representation of several preset views of a model, as captured by means of virtual cameras positioned on latitude and meridian lines of a sphere; and

Fig. 5 is a schematic illustration of five different views of a model portion in a multi-view display mode of operation.

DESCRIPTION OF SPECIFIC EMBODIMENTS

Attention is directed to Fig 2, illustrating a view control box (referred to also as GUI), according to one embodiment of the invention. By a non limiting example, the specified view control box is realized as an icon 10 of the kind provided by Windows 95 operating system, commercially available from Microsoft, Inc. Whilst not shown in Fig. 2, the specified GUI is portrayed on a conventional display device that is coupled to, e.g. a conventional P.C. accommodating also a 30 Central Processing Unit (CPU), storage means and an input device, such as mouse.

The GUI of Fig. 2 provides a minimized virtual 3D dental model 11, encircled by a graphic symbol (ring) 12 bearing eight graphic symbols 14₍₁₎ to 14₍₈₎ indicative of eight respective preset views of the dental model, with each two consecutive views shifted by 45° one with respect to the other.

The preset view $14_{(1)}$ corresponds to the front view of the model (i.e. along the X axis as depicted in Fig. 3) and the remaining seven preset views are shifted by 45° increments each.

5

10

15

20

25

30

If, for example, a conventional mouse is used as an input device, any click on one of the specified graphic symbols $14_{(1)}$ to $14_{(8)}$, will result in displaying the model from the preset view that correspond to the selected graphic symbol.

Consider, for example, that the default display of the dental model is the preset view that corresponds to graphic symbol 14₍₁₎ (i.e front view), and that the user selects graphic symbol 14₍₃₎. The virtual dental model will then be viewed with 90° shift (as will be explained in greater detail with reference to Fig. 4, below), and this may be realized according to known per se rotating techniques such as "J.D. Foley and A. Van Dam, "Fundamentals of Interactive Computer Graphics".

Selecting graphic symbols $16_{(1)}$ and $16_{(2)}$ results in respective clockwise (CW) and counter clockwise (CCW) continuous rotation of the model between the preset views, or in other words it provides for an indefinite number of preset views of the dental model.

Clicking on graphic symbol 18 will result in elevating the model, as will be explained in greater detail below.

By this particular embodiment, clicking on the graphic symbol $20_{(1)}$ will result in elevating the model in the direction prescribed by arrow $20_{(1)}$, whereas clicking on the graphic symbol $20_{(2)}$ will result in elevating the model in the direction prescribed by arrow $20_{(2)}$.

By this particular embodiment, the closer the mouse cursor to the arrow head, the faster the elevation.

The elevation operation may be realized according to known per se techniques e.g. J.D. Foley and A. Van Dam ibid.

The graphic symbols illustrated in Fig. 2 are, of course, only examples. Whenever required, graphic symbols may include also text, and/or may bring about sound effect.

Preferably, icon 10 is displayed in minimized form whereas the model itself, after having been brought to the preset view, is displayed in a separate window having scalable window size. Preferably, the window size is manipulated by utilizing built-in operating system primitives.

5

10

15

20

25

30

If desired, indication as to the point in space from which the specified preset view is observed, may be also provided by the GUI of Fig. 2.

The rotation and elevation operations referred to in Fig. 2, may be represented, for illustrative purposes, as pre-set views that are captured by respective virtual cameras positioned or moving along a coordinate system superimposed on a virtual surface, e.g. a sphere, surrounding and being essentially concentric with the dental model (Fig. 4).

Representative, yet not exclusive, example of such a coordinate system is latitude and meridian lines.

Those versed in the art will readily appreciate that a sphere is only one possible closed two dimensional surface of 3D space that surrounds the dental model and accordingly by yet another non-limiting example, the virtual cameras move on a surface of ellipsoid that surrounds the dental model.

Thus, circles 32 and 34 illustrate two, out of virtually an indefinite number, of possible horizontal circles along which the cameras can move.

As shown, eight preset virtual cameras are placed along circle 32, with each camera capturing a given preset view as selected by graphic symbols $14_{(1)}$ to $14_{(8)}$, respectively (see Fig. 2). Likewise, four cameras which correspond to four preset views are placed along circle 34, each camera angularly shifted by 90° with respect to adjacent camera. The specified four views are selected by graphic symbols $14_{(1)}$, $14_{(3)}$, $14_{(5)}$ and $14_{(7)}$, respectively. Since circle 32 in effectively coplanner with the occlusion plane of the model, the optical axis of the virtual cameras reside in the XY plane of the XYZ coordinate system preferably so as to maintain the dental model in optimal zoom. Conversely, since circle 34 is elevated with respect to circle 32, the optical axis of the virtual cameras are tilted

downwardly towards the model with respect to the XY plane of the XYZ coordinate system preferably in order to maintain the latter in optimal zoom.

When moving along circle 34, the elevation is retained, i.e. moving along a plane which is essentially parallel to the occlusion plane.

5

10

15

20

25

30

Occlusion plane is this context is defined as "Horizontal plane through the tips of the buccal cusps of the premolars or the tips of the mesiobuccal cusps of the first molars and first premolars" (see Color atlas of dental medicine, orthodont diagnosis, by Thomas Rakoski)

In order to move from one horizontal circle to the other the cameras can move along vertical circle 36, which as specified before is realized by known per se rotating techniques.

Preferably, the GUI also provides for graphic symbols representative of

"OPEN JAW", "CLOSE JAW", (22 in Fig. 2). The latter may be realized, e.g. ___ open/close Jaw by following the technique disclosed in "Joseph A. Gibilisko DDS, Charles McNeill DDS and Harold T. Perry DDS, "Orofacial Pain".

By this particular embodiment, the dental model 11 itself also constitutes a graphic symbol, i.e. clicking on the upper jaw 23 will render it transparent, further click will render it blank, and yet further click will revert it to normal, as depicted in Fig. 2.

The proposed GUI of the invention may, of course, be incorporated into the GUI as provided for example by the operating system. Thus, by way of example, insofar as the GUI of a Windows-based operating system is concerned (version 3.x or 95), the desired preset view of the model may be portrayed on one window whilst other predetermined views may be portrayed simultaneously on different windows, thereby providing multiple views of the dental model (multiview display mode).

A typical, yet not exclusive, example of the additional windows in a multi-view display mode is depicted in Fig. 5, showing respective left, front, right, maxilla and mandibular, views of the individual's dental arches.

The present invention has been described with a certain degree of particularity, but it should be understood that various alterations and modifications

methyle views

can be made without departing from the spirit or scope of the invention as hereinafter claimed.

CLAIMS:

5

10

15

20

1. In a computer system comprising a Central Processing Unit and an associated input device, storage device and display device, a method for displaying on said display device a virtual three dimensional (3D) dental model at desired preset views, for orthodontic use; the virtual 3D dental model is stored on said storage device and is indicative of at least a 3D structure of an individual's dental arches; the method comprising the steps of:

- (a) providing a graphic user interface (GUI) that includes a graphic representation of the dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;
 - (b) selecting through said input device a graphic symbol from among said plurality of graphic symbols;
 - (c) responsive to the selection of said graphic symbol, moving the dental model or portion thereof to at least one pre-set view which corresponds to said graphic symbol, whilst retaining the model essentially in zoom.
- 2. The method of Claim 1, wherein at least several of said pre-set views correspond to views captured by virtual cameras positioned or moving along substantially latitude lines and substantially meridian lines of a virtual closed two dimensional surface of 3D space that surrounds said dental model and is essentially concentric therewith.
- 3. The method according to claim 2, wherein said two dimensional surface is a spherical surface.
- 25 4. The method according to claim 2, wherein said two dimensional surface is an ellipsoidal surface.
 - 5. The method according to Claim 1, further comprising at least one graphic symbol for facilitating continuous movement of the model, thereby attaining a succession of an indefinite number of pre set views of said model.
- 30 6. The method according to Claim 1, wherein said GUI is portrayed as an icon on said display device and the dental model stipulated in step (c) is portrayed on a separate window, on said display device.

7. The method according to Claim 6, wherein further simultaneous respective preset views of said model or portion thereof, are portrayed on other windows.

- 8. The method according to Claim 1, further comprising graphical symbols representative of either or both of open and close jaw preset views.
- 9. The method according to Claim 1, further comprising indication as to the point in space from which the specified preset view is observed.
- 10. For use in a method according to Claim 1, said step (a).

5

10

15

20

25

30

- 11. In a computer system comprising a Central Processing Unit and an associated input device, storage means and display device, a method for displaying on said display device a virtual three dimensional (3D) dental model at desired preset views, for orthodontic use; the virtual 3D dental model is stored on said storage means and is indicative of at least a 3D structure of an individual's dental arches; the method comprising the steps of:
 - (a) providing a graphic user interface (GUI) that includes:

a minimized virtual 3D dental model associated with at least one graphic symbol for obtaining preset views of the dental model along selected substantially latitude line;

the GUI further includes at least one graphic symbol for obtaining preset views of the model along selected substantially meridian line.

- (b) selecting by means of said input device a graphic symbol from among said plurality of graphic symbols;
- (c) responsive to the selection of said graphic symbol, moving the dental model or portion thereof to at least one pre-set view which corresponds to said graphic symbol, whilst retaining the model essentially in zoom.
- 12. The method of Claim 11, wherein the GUI stipulated in step (a), comprising

a minimized virtual 3D dental model encircled by a graphic symbol that constitutes a ring bearing plurality of graphic symbols indicative of respective preset views of the dental model, with each two consecutive views shifted by X° one with respect to the other, along selected substantially latitude line;

said ring further bears graphic symbols for respective clockwise and counter clockwise continuous rotation of the model between selected preset views along said substantially latitude line;

the GUI further includes a vertical ring constituting a graphic symbol for altering the elevation of the model along selected substantially meridian line;

said vertical ring bears graphic symbols for elevating the model in respective upward and downward elevation along said substantially meridian line.

- 13. The method according to Claim 11, wherein said plurality of graphic symbols correspond to respective front view of the model and other preset views are shifted by X° increments each.
- 14. For use in a method according to Claim 11, said step (a).

5

10

15

20

25

- 15. A computer system comprising a Central Processing Unit and an associated input device, storage device and display device, the computer system is adapted to display on said display device a virtual three dimensional (3D) dental model at desired pre-set views, for orthodontic use; the virtual 3D dental model is stored on said storage device and is indicative of at least a 3D structure of an individual's dental arches; the computer system comprising:
 - (a) a graphic user interface (GUI) that includes a graphic representation of the dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;
 - (b) device responsive to activation of said input device for selecting a graphic symbol from among said plurality of graphic symbols;
 - (c) device responsive to the selection of said graphic symbol, for moving the dental model or portion thereof to at least one pre-set view which corresponds to said graphic symbol, whilst retaining the model essentially in zoom.
- 16. For use in a computer system of Claim 14,
- a graphic user interface (GUI) that includes a graphic representation of
 the dental model and a plurality of graphic symbols each representative of at
 least one desired pre-set view of the dental model or a portion thereof from
 respective desired directions.

17. A memory for storing data indicative of a graphic user interface (GUI), for access by a user in order to activate application program for orthodontic use; said GUI includes a graphic representation of a dental model and a plurality of graphic symbols each representative of at least one desired pre-set view of the dental model or a portion thereof from respective desired directions;

said dental model is indicative of at least a 3D structure of an individual's dental arches.

5




FIG.1A




FIG.1B






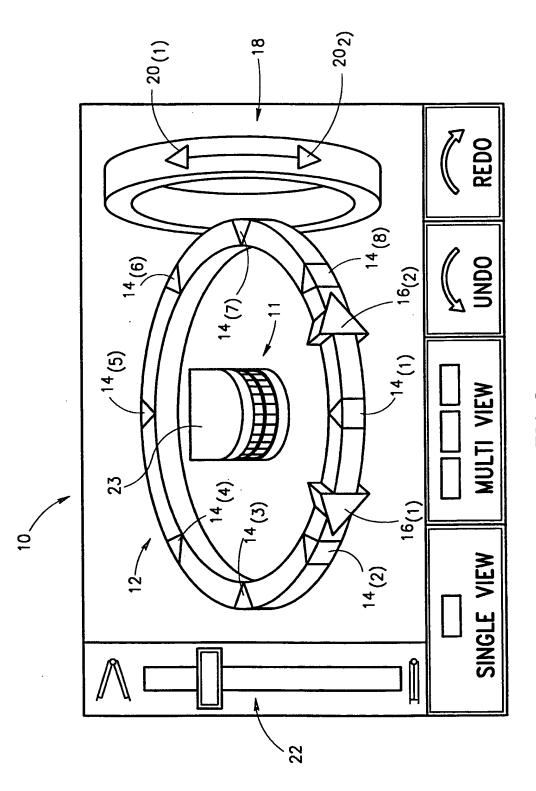


FIG.2

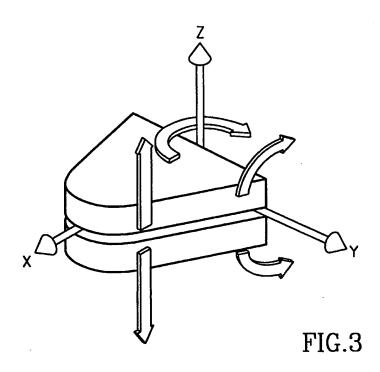

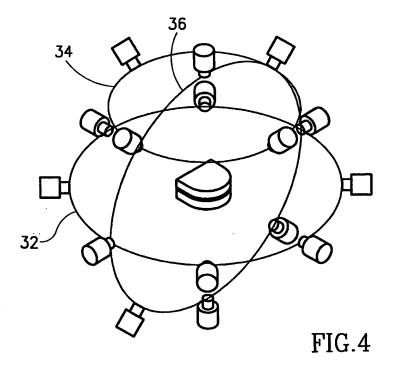

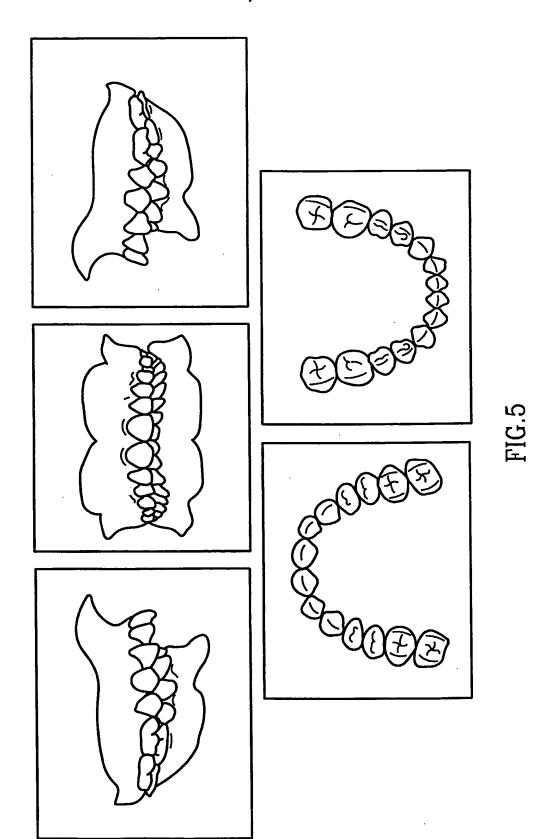

INTERNATIONAL SEARCH REPORT

national Application No PCT/IL 98/00222

A. CLASSI IPC 6	FICATION OF SUBJECT MATTER G06T17/40 G06F3/033		
According to	o international Patent Classification (IPC) or to both national classificat	ion and IPC	
	SEARCHED		
	SEARCHED currentation searched (classification system followed by classification	n symbols)	
IPC 6	G06T G06F A61C		
Documental	tion searched other than minimum documentation to the extent that sur	ch documents are included in the fields sea	rched
Electronic d	ata base consulted during the international search (name of data base	e and, where practical, search terms used)	
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT	· · · · · · · · · · · · · · · ·	
Category °	Citation of document, with indication, where appropriate, of the relev	vant passages	Relevant to claim No.
l		1004	1 2 7
Y	WO 94 10935 A (ORMCO CORP) 26 May	1994	1,5-7,
			9-11, 14-16
	see page 16, line 3-11		- · · ·
	see figures 1,1B,3A,6		
X			17
ļγ	EP 0 658 839 A (IBM) 21 June 1995		1,5-7,
"	El 0 030 033 W (10H) 21 onlie 1993		9-11,
			14-16
	see column 1, line 43 - column 2,	line 3	
]	see column 4, line 36-39		
	see column 4, line 51-54 see figures 10,11		
l a	July 11 10,11		2-4,8,
1			12,13
			
Furl	ther documents are listed in the continuation of box C.	Patent family members are listed i	n annex.
° Special co	alegories of cited documente :	"T" later document published after the inter	rnational filing date
	ent defining the general state of the art which is not	or priority date and not in conflict with cited to understand the principle or th	the application but
"E" earlier	dered to be of particular relevance document but published on or after the international	invention "X" document of particular relevance; the o	laimed invention
filing		cannot be considered novel or cannot involve an inventive step when the do	be considered to
which	in is cited to establish the publication date of another on or other special reason (as specified)	"Y" document of particular relevance; the o	laimed invention
"O" docum	nent referring to an oral disclosure, use, exhibition or	cannot be considered to involve an in document is combined with one or ma	ore other such docu-
1	means ent published prior to the international filing date but	ments, such combination being obvio in the art.	•
later	than the priority date claimed	"&" document member of the same patent	
Date of the	actual completion of theinternational search	Date of mailing of the international sea	erch report
2	27 August 1998	03/09/1998	
Name and	mailing address of the ISA	Authorized officer	
	European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk		
	Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Chabus, H	

INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No PCT/IL 98/00222

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9410935	A	26-05-1994	US US US AU EP JP US US	5368478 A 5447432 A 5454717 A 5431562 A 5598894 A 0667753 A 8508174 T 5683243 A 5542842 A 5474448 A 5456600 A	29-11-1994 05-09-1995 03-10-1995 11-07-1995 08-06-1994 23-08-1995 03-09-1996 04-11-1997 06-08-1996 12-12-1995 10-10-1995
EP	0658839	Α	21-06-1995	US JP JP	5511157 A 2705715 B 7200880 A	23-04-1996 28-01-1998 04-08-1995